


models 2892C-LMI

2892C-HYCAS

product guide

features

- 28 ton (25,5 mton) capacity
- 4-section, 92' (28 m) proportional boom
- 149' 1" (45,4 m) maximum tip height
- 103' (31,4 m) maximum main boom tip height
- 2-section, 26' (7,9 m) to 46' (14 m) jib
- 2-speed planetary hoist with grooved drum and negative draft flange
- (2892C-LMI) Load moment indicator with digital display and overload shutdown
- (2892C-HYCAS) Hydraulic capacity alert system
- 21' 6" (6,6 m) A-frame outriggers
- 13' 7" (4,1 m) out-and-down rear stabilizers
- Removable boom rest
- System pressure gauge
- Clamp-on mounting
- Rugged, weatherproof, automotive style electrical system
- Manitowoc CraneCARESM comprehensive support

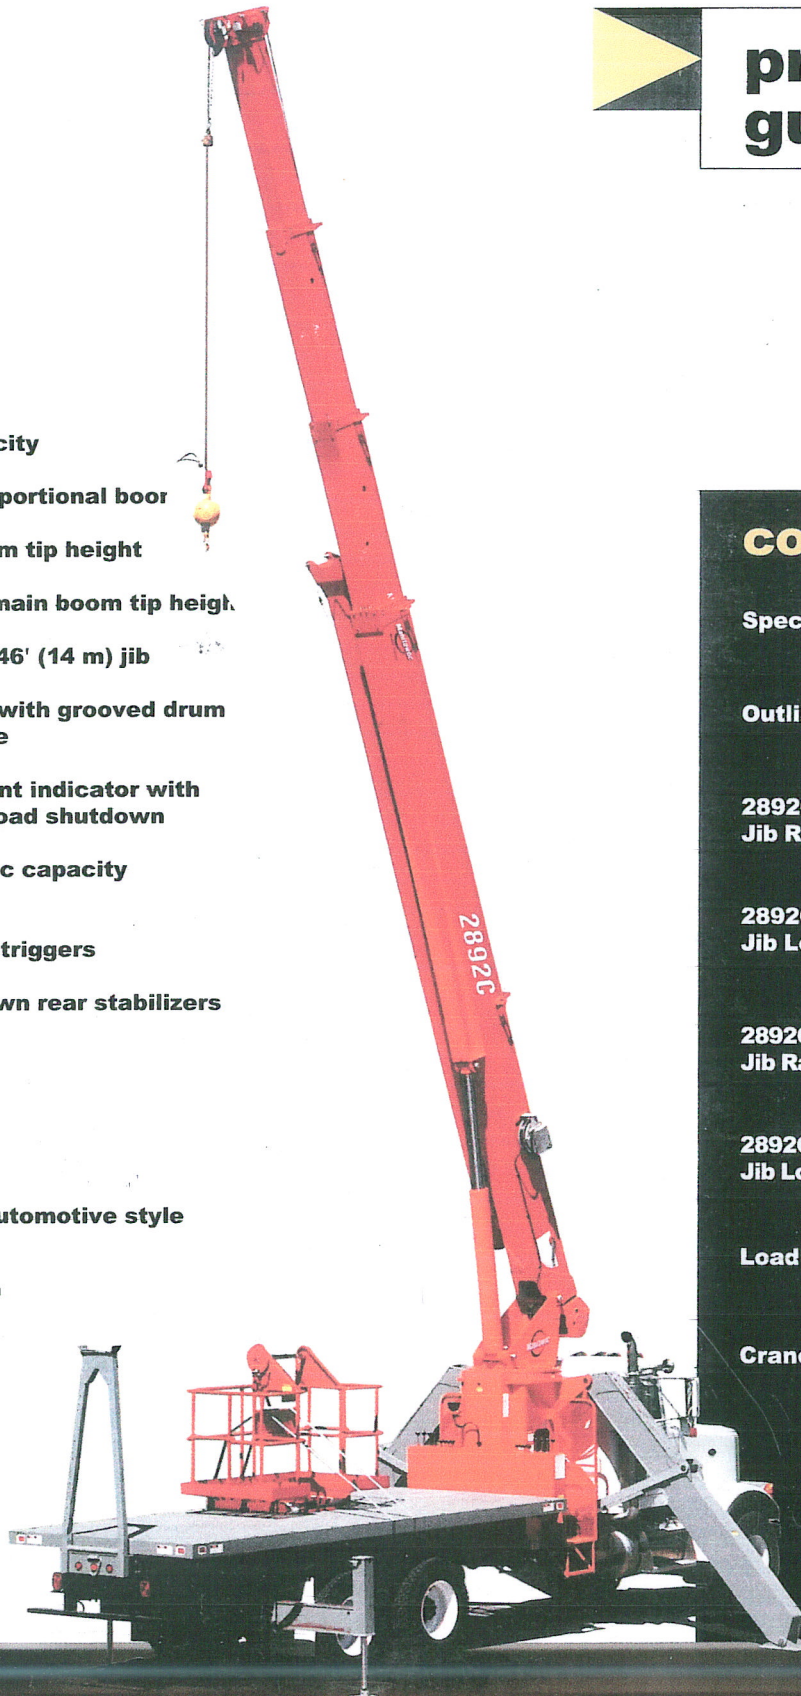

contents

Specifications	2
Outline Dimensions	4
2892C-LMI Boom/ Jib Range Diagram	6
2892C-LMI Boom/ Jib Load Charts	7
2892C-HYCAS Boom/ Jib Range Diagram	8
2892C-HYCAS Boom/ Jib Load Charts	9
Load Chart Data	10
CraneCARE SM	11

Manitowoc

Boom Trucks